

# CENTRALIZE CCTV POWER SYSTEM

## PROFESSIONAL SERIES

POWER SYSTEM INTERNAL  
PCB MODULE



### Features:

- Wide range AC power input, 110VAC ~ 260VAC 50/60 Hz.
- Adjustable output voltage (12VDC ~ 14VDC)
- Individual protection resettable fuse for every output channel
- AC main power fuse protection (3A)
- AC main power LED indicator
- Over current protection
- Over voltage protection
- Surge protection outputs
- Maintains camera synchronization
- Enable/disable DC power output individually by jumper selector
- Built in internal AC main power On/Off switch for easy maintenance & troubleshooting
- AC power cord included
- Lockable metal enclosure (2 keys provided)
- Ventilated enclosure design
- Powder coating metal enclosure for long lasting durable usage



### MODELS:

**PSB-16/12A**

16 channel power output - 12 Amp.

**PSB-9/10A**

9 channel power output - 10 Amp.




## PRODUCT SPECIFICATIONS


| MODEL                                | PSB - 9/10A                                      | PSB - 16/12A                  |
|--------------------------------------|--------------------------------------------------|-------------------------------|
| <b>CHANNEL</b>                       |                                                  |                               |
| Output Channel                       | 9                                                | 16                            |
| Individual Output Enable/Disable     | Yes                                              |                               |
| <b>VOLTAGE</b>                       |                                                  |                               |
| Voltage Input                        | AC 110 ~ 260V                                    | AC 110 ~ 130V / AC 190 ~ 260V |
| Voltage Frequency                    | 50 ~ 60Hz.                                       |                               |
| Voltage Output                       | 12VDC ~ 14VDC (adjustable)                       |                               |
| Current Output                       | 10A                                              | 12A                           |
| Ripple                               | < 50mV                                           |                               |
| Efficiency                           | > 85%                                            |                               |
| <b>PROTECTION</b>                    |                                                  |                               |
| AC Input Protection                  | Yes - 3A (blow fuse type)                        |                               |
| Individual Channel Output Protection | Yes - 1A (auto reset-able fuse)                  |                               |
| Over Current Protection              | Yes                                              |                               |
| Over Voltage Protection              | Yes                                              |                               |
| Output Surge Protection              | Yes                                              |                               |
| Internal AC main On/Off Switch       | Yes                                              |                               |
| <b>INDICATOR</b>                     |                                                  |                               |
| Power Input                          | Yes - Front panel / Internal PCB (LED)           |                               |
| Power Output                         | Yes - Individually on every output channel (LED) |                               |
| <b>ENCLOSURE</b>                     |                                                  |                               |
| Color                                | Grey beige / Dark grey                           |                               |
| Material                             | Metal                                            |                               |
| Coating                              | Baked powder spray                               |                               |
| Ventilation                          | Yes - Both sides                                 |                               |
| Security Lock                        | Yes - Supplied with 2 keys                       |                               |
| Weatherproof                         | No                                               |                               |
| Weight                               | 1.4 kgs.                                         | 2.2 kgs.                      |
| Dimension                            | 200 x 202 x 50mm                                 | 205 x 305 x 50mm              |

## DIMENSION

Model: PSB - 9/10A

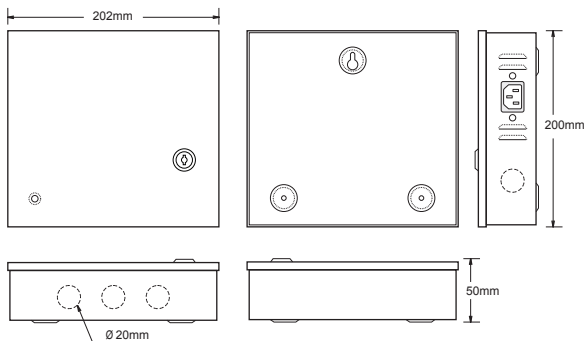

Model: PSB - 16/12A

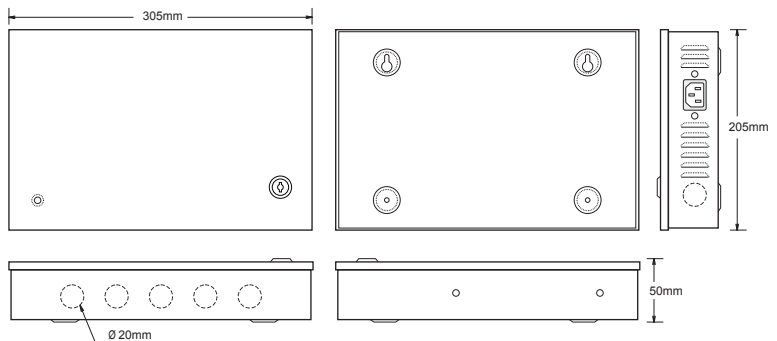

Authorised Dealer:

**INOX SECURITY PTY. LTD.**

- Canada (Incorporation No. BC 0722077)

**INOX MANUFACTURING (M) SDN. BHD.**

- Malaysia (Company No. 671850-H)

[www.inox.com.my](http://www.inox.com.my)

Specifications, description and design are subject to change without prior notice. The brands and products names are properties of their respective owners



Scan to view online